

**LITHIUM IRON PHOSPHATE BATTERY**

<b>ELECTRICAL PERFORMANCE</b>	
Nominal Voltage	12.8 V
Nominal Capacity	200 Ah
Capacity @ 40A	300 min
Energy	2560 Wh
Resistance	≤10 mΩ @ 50% SOC
Self Discharge	<3% / Month
Cells	IFR26650EC

<b>CHARGE PERFORMANCE</b>	
Recommended Charge Current	40 A
Maximum Charge Current	100 A
Recommended Charge Voltage	14.6 V
BMS Charge Cut-Off Voltage	<15.0 V (3.75V/Cell)
Reconnect Voltage	>14.2 V (3.55V/Cell)
Balancing Voltage	<14.4 V (3.6V/Cell)
Maximum Batteries in Series	4

<b>DISCHARGE PERFORMANCE</b>	
Maximum Continuous Discharge Current	100 A
Peak Discharge Current	150 A (30min)
BMS Discharge Cut-Off Current	400 A ± 50 A (100 ~ 300 ms)
Recommended Low Voltage Disconnect	11 V
BMS Discharge Cut-Off Voltage	>8.8 V (1000 ~ 5000 ms) (2.2V/Cell)
Reconnect Voltage	>10.8 V (2.7V/Cell)
Short Circuit Protection	200 ~ 500 μs




<b>MECHANICAL PERFORMANCE</b>	
Dimension (L x W x H)	520 x 268x 228 mm 20.5 x 10.6 x 9"
Approx. Weight	53.4 lbs (24.2 kg)
Terminal Type	M8
Terminal Torque	80 ~ 100 in-lbs (9 ~ 11 N-m)
Case Material	ABS
Enclosure Protection	IP65

<b>TEMPERATURE PERFORMANCE</b>	
Discharge Temperature	-4 ~ 140 °F (-20 ~ 60 °C)
Charge Temperature	32 ~ 113 °F (0 ~ 45 °C)
Storage Temperature	23 ~ 95 °F (-5 ~ 35 °C)
BMS High Temperature Cut-Off	149 °F (65 °C)
Reconnect Temperature	113 °F (45 °C) (Charge) 131 °F (55 °C) (Discharge)

<b>COMPLIANCE</b>	
Certifications	CE (battery) UN38.3 (battery) UL1642 & IEC62133 (cells)
Shipping Classification	UN 3480, CLASS 9





**OUTLINE DIMENSION**

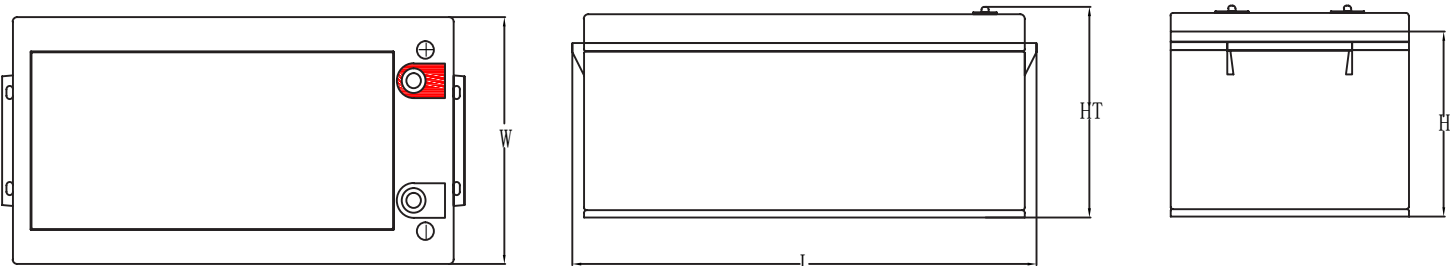

L mm(")	W mm(")	H mm(")	HT mm(")
520 (20.5)	267 (10.5)	221 (8.7)	228 (9.0)

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.

**PERFORMANCE CHARACTERISTICS**

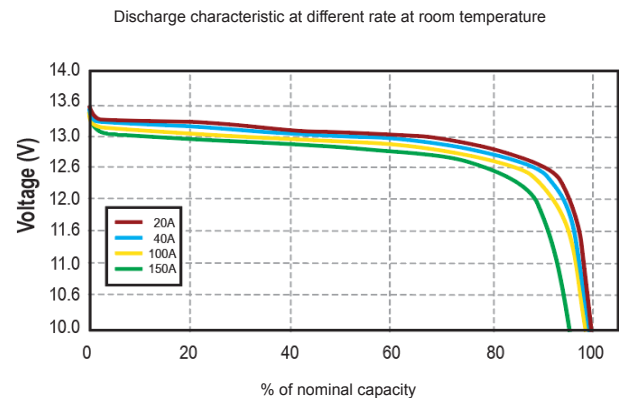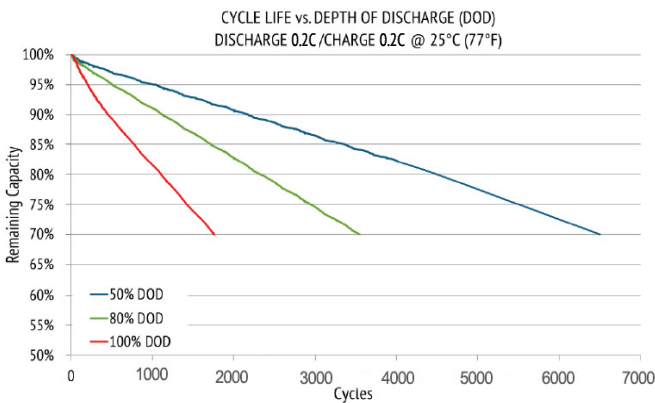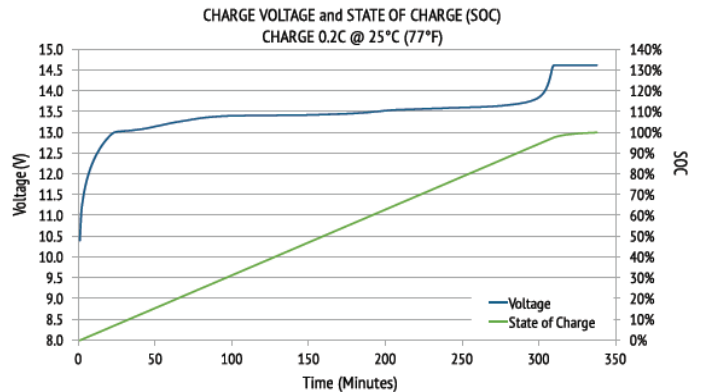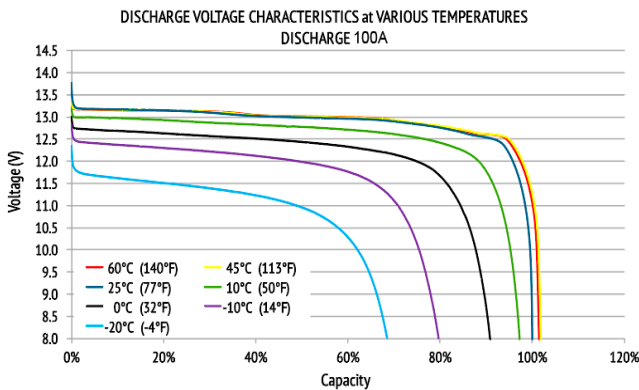

**FEATURES & BENEFITS**



**High cycle life**

>2000 cycles @80% DoD for effectively lower total cost of ownership.



**Longer service life**

Low maintenance batteries with stable chemistry. Easily monitor battery status via mobile APP.



**Built in circuit protection**

Battery Management Systems (BMS) are incorporated against abuse.



**Better storage**

up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



**Quickly recharge**

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



**Extreme heat tolerance**

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



**Lightweight**

Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

**APPLICATIONS**

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries. Suitable applications include:

- Caravan
- Marine
- Golf Car
- Buggies
- Solar Storage
- Remote Monitoring
- Switching applications and more

**CAUTIONS**

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Store at 30~50% SOC. Recharging every 3 months is recommended. The storage area should be clean, cool, dry and ventilated.

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.